


Excalibur® Flanged Check Valves

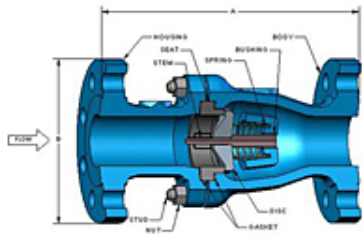

The DFT® Excalibur® Silent Check Valve is a spring-assisted, center guided, in-line, check valve that provides reliable, low maintenance service for a wide range of fluids and pressure/temperature combinations. The valve consists of a body, gasket, seat, spring, disc with stem and guide bushing. Excalibur® check valves are available in a wide range of sizes and pressure ratings and in a variety of metals to meet most check valve requirements.

Results 1 - 79 of 79

Prod. #	Class	Size	Dimension A	Dimension B	Cv	Cracking Pressure CP	Body
222H1A4A3	150	DN 50 2 in	8.00 in 203 mm	6.00 in 152 mm	65	0.64 psig 0.044 bar	A216 Grade WCB
222J1A4A3	150	DN 65 2.5 in	8.50 in 216 mm	7 in 178 mm	105	0.44 psig 0.030 bar	A216 Grade WCB
222K1A4A3	150	DN 80 3 in	9.50 in 241 mm	7.50 in 191 mm	155	0.26 psig 0.018 bar	A216 Grade WCB
222L1A4A3	150	DN 100 4 in	11.50 in 292 mm	9 in 229 mm	265	0.6 psig 0.041 bar	A216 Grade WCB
222N1A4A3	150	DN 150 6 in	14 in 356 mm	11 in 279 mm	685	0.40 psig 0.028 bar	A216 Grade WCB
222O1A4A3	150	DN 200 8 in	19.50 in 495 mm	13.50 in 343 mm	1050	0.58 psig 0.040 bar	A216 Grade WCB
222P1A4A3	150	DN 250 10 in	24.50 in 622 mm	16 in 406 mm	1650	0.52 psig 0.036 bar	A216 Grade WCB
222R1A4A3	150	DN 300 12 in	27.50 in 699 mm	19 in 483 mm	2400	0.53 psig 0.037 bar	A216 Grade WCB
222S1A4A3	150	DN 350 14 in	31 in 787 mm	21 in 533 mm	3600	0.28 psig 0.019 bar	A216 Grade WCB
222T1A4A3	150	DN 400 16 in	34 in 864 mm	23.50 in 597 mm	5200	0.51 psig 0.035 bar	A216 Grade WCB
222X1A4A3	150	DN 600 24 in	51 in 1295 mm	32 in 813 mm	11300	0.42 psig 0.029 bar	A216 Grade WCB
222H1B4A3	300	DN 50 2 in	10.50 in 267 mm	6.50 in 165 mm	65	0.64 psig 0.044 bar	A216 Grade WCB
222J1B4A3	300	DN 65 2.5 in	11.50 in 292 mm	7.50 in 191 mm	105	0.37 psig 0.026 bar	A216 Grade WCB
222K1B4A3	300	DN 80 3 in	12.50 in 318 mm	8.25 in 210 mm	155	0.26 psig 0.018 bar	A216 Grade WCB
222L1B4A3	300	DN 100 4 in	14 in 356 mm	10 in 254 mm	265	0.41 psig 0.028 bar	A216 Grade WCB
222N1B4A3	300	DN 150 6 in	17.50 in 445 mm	12.50 in 318 mm	685	0.40 psig 0.028 bar	A216 Grade WCB
222O1B4A3	300	DN 200 8 in	21 in 533 mm	15 in 381 mm	1050	0.6 psig 0.041 bar	A216 Grade WCB
222P1B4A3	300	DN 250 10 in	24.50 in 622 mm	17.50 in 445 mm	1650	0.52 psig 0.036 bar	A216 Grade WCB
222R1B4A3	300	DN 300 12 in	28 in 711 mm	20.50 in 521 mm	2400	0.53 psig 0.037 bar	A216 Grade WCB
222S1B4A3	300	DN 350 14 in	33 in 838 mm	23 in 584 mm	3600	0.28 psig 0.019 bar	A216 Grade WCB
222W1B4A3	300	DN 500 20 in	40 in 1016 mm	30.50 in 775 mm	7850	0.5 psig 0.034 bar	A216 Grade WCB
222H1C4A3	600	DN 50 2 in	11.50 in 292 mm	6.50 in 165 mm	65	0.64 psig 0.044 bar	A216 Grade WCB
222K1C4A3	600	DN 80 3 in	14 in 356 mm	8.25 in 210 mm	155	0.26 psig 0.018 bar	A216 Grade WCB

222L1C4A3	600	DN 100 4 in	17 in 432 mm	10.75 in 273 mm	265	0.51 psig 0.035 bar	A216 Grade WCB
222N1C4A3	600	DN 150 6 in	22 in 559 mm	14 in 356 mm	584	0.73 psig 0.050 bar	A216 Grade WCB
222O1C4A3	600	DN 200 8 in	26 in 660 mm	16.50 in 419 mm	985	0.67 psig 0.046 bar	A216 Grade WCB
222P1C4A3	600	DN 250 10 in	31 in 787 mm	20 in 508 mm	1650	0.47 psig 0.032 bar	A216 Grade WCB
222R1C4A3	600	DN 300 12 in	33 in 838 mm	22 in 559 mm	2400	0.5 psig 0.034 bar	A216 Grade WCB
222H1D4A3	900	DN 50 2 in	14.50 in 368 mm	8.50 in 216 mm	51	0.85 psig 0.059 bar	A216 Grade WCB
222K1D4A3	900	DN 80 3 in	15 in 381 mm	9.50 in 241 mm	138	0.22 psig 0.015 bar	A216 Grade WCB
222L1D4A3	900	DN 100 4 in	18 in 457 mm	11.50 in 292 mm	242	0.58 psig 0.040 bar	A216 Grade WCB
222N1D4A3	900	DN 150 6 in	24 in 610 mm	15 in 381 mm	512	0.83 psig 0.057 bar	A216 Grade WCB
222O1D4A3	900	DN 200 8 in	29 in 737 mm	18.50 in 470 mm	777	0.54 psig 0.037 bar	A216 Grade WCB
222P1D4A3	900	DN 250 10 in	33 in 838 mm	21.50 in 546 mm	1449	0.58 psig 0.040 bar	A216 Grade WCB
222H1E4A3	1500	DN 50 2 in	14.50 in 368 mm	8.50 in 216 mm	51	0.85 psig 0.059 bar	A216 Grade WCB
222K1E4A3	1500	DN 80 3 in	18.50 in 470 mm	10.50 in 267 mm	109	0.28 psig 0.019 bar	A216 Grade WCB
222L1E4A3	1500	DN 100 4 in	21.50 in 546 mm	12.25 in 311 mm	187	0.74 psig 0.051 bar	A216 Grade WCB
222N1E4A3	1500	DN 150 6 in	27.75 in 705 mm	15.50 in 394 mm	512	0.83 psig 0.057 bar	A216 Grade WCB
222O1E4A3	1500	DN 200 8 in	32.75 in 832 mm	19 in 483 mm	777	0.83 psig 0.057 bar	A216 Grade WCB
222P1E4A3	1500	DN 250 10 in	N/A	N/A	N/A	N/A	A216 Grade WCB
225H1A4A3	150	DN 50 2 in	8.00 in 203 mm	6.00 in 152 mm	65	0.64 psig 0.044 bar	A351 CF8M
225J1A4A3	150	DN 65 2.5 in	8.50 in 216 mm	7 in 178 mm	105	0.44 psig 0.030 bar	A351 CF8M
225K1A4A3	150	DN 80 3 in	9.50 in 241 mm	7.50 in 191 mm	155	0.26 psig 0.018 bar	A351 CF8M
225L1A4A3	150	DN 100 4 in	11.50 in 292 mm	9 in 229 mm	265	0.6 psig 0.041 bar	A351 CF8M
225N1A4A3	150	DN 150 6 in	14 in 356 mm	11 in 279 mm	685	0.40 psig 0.028 bar	A351 CF8M
225O1A4A3	150	DN 200 8 in	19.50 in 495 mm	13.50 in 343 mm	1050	0.58 psig 0.040 bar	A351 CF8M
225P1A4A3	150	DN 250 10 in	24.50 in 622 mm	16 in 406 mm	1650	0.52 psig 0.036 bar	A351 CF8M
225R1A4A3	150	DN 300 12 in	27.50 in 699 mm	19 in 483 mm	2400	0.53 psig 0.037 bar	A351 CF8M
225S1A4A3	150	DN 350 14 in	31 in 787 mm	21 in 533 mm	3600	0.28 psig 0.019 bar	A351 CF8M
225T1A4A3	150	DN 400 16 in	34 in 864 mm	23.50 in 597 mm	5200	0.51 psig 0.035 bar	A351 CF8M
225X1A4A3	150	DN 600 24 in	51 in 1295 mm	32 in 813 mm	11300	0.42 psig 0.029 bar	A351 CF8M
225H1B4A3	300	DN 50 2 in	10.50 in 267 mm	6.50 in 165 mm	65	0.64 psig 0.044 bar	A351 CF8M
225J1B4A3	300	DN 65 2.5 in	11.50 in 292 mm	7.50 in 191 mm	105	0.37 psig 0.026 bar	A351 CF8M
225K1B4A3	300	DN 80 3 in	12.50 in 318 mm	8.25 in 210 mm	155	0.26 psig 0.018 bar	A351 CF8M
225L1B4A3	300	DN 100 4 in	14 in 356 mm	10 in 254 mm	265	0.41 psig 0.028 bar	A351 CF8M
225N1B4A3	300	DN 150 6 in	17.50 in 445 mm	12.50 in 318 mm	685	0.40 psig 0.028 bar	A351 CF8M

225O1B4A3	300	DN 200 8 in	21 in 533 mm	15 in 381 mm	1050	0.6 psig 0.041 bar	A351 CF8M
225P1B4A3	300	DN 250 10 in	24.50 in 622 mm	17.50 in 445 mm	1650	0.52 psig 0.036 bar	A351 CF8M
225R1B4A3	300	DN 300 12 in	28 in 711 mm	20.50 in 521 mm	2400	0.53 psig 0.037 bar	A351 CF8M
225S1B4A3	300	DN 350 14 in	33 in 838 mm	23 in 584 mm	3600	0.28 psig 0.019 bar	A351 CF8M
225W1B4A3	300	DN 500 20 in	40 in 1016 mm	30.50 in 775 mm	7850	0.5 psig 0.034 bar	A351 CF8M
225H1C4A3	600	DN 50 2 in	11.50 in 292 mm	6.50 in 165 mm	65	0.64 psig 0.044 bar	A351 CF8M
225K1C4A3	600	DN 80 3 in	14 in 356 mm	8.25 in 210 mm	155	0.26 psig 0.018 bar	A351 CF8M
225L1C4A3	600	DN 100 4 in	17 in 432 mm	10.75 in 273 mm	265	0.51 psig 0.035 bar	A351 CF8M
225N1C4A3	600	DN 150 6 in	22 in 559 mm	14 in 356 mm	584	0.73 psig 0.050 bar	A351 CF8M
225O1C4A3	600	DN 200 8 in	26 in 660 mm	16.50 in 419 mm	985	0.67 psig 0.046 bar	A351 CF8M
225P1C4A3	600	DN 250 10 in	31 in 787 mm	20 in 508 mm	1650	0.47 psig 0.032 bar	A351 CF8M
225R1C4A3	600	DN 300 12 in	33 in 838 mm	22 in 559 mm	2400	0.5 psig 0.034 bar	A351 CF8M
225H1D4A3	900	DN 50 2 in	14.50 in 368 mm	8.50 in 216 mm	51	0.85 psig 0.059 bar	A351 CF8M
225K1D4A3	900	DN 80 3 in	15 in 381 mm	9.50 in 241 mm	138	0.22 psig 0.015 bar	A351 CF8M
225L1D4A3	900	DN 100 4 in	18 in 457 mm	11.50 in 292 mm	242	0.58 psig 0.040 bar	A351 CF8M
225N1D4A3	900	DN 150 6 in	24 in 610 mm	15 in 381 mm	512	0.83 psig 0.057 bar	A351 CF8M
225O1D4A3	900	DN 200 8 in	29 in 737 mm	18.50 in 470 mm	777	0.54 psig 0.037 bar	A351 CF8M
225P1D4A3	900	DN 250 10 in	33 in 838 mm	21.50 in 546 mm	1449	0.58 psig 0.040 bar	A351 CF8M
225H1E4A3	1500	DN 50 2 in	14.50 in 368 mm	8.50 in 216 mm	51	0.85 psig 0.059 bar	A351 CF8M
225K1E4A3	1500	DN 80 3 in	18.50 in 470 mm	10.50 in 267 mm	109	0.28 psig 0.019 bar	A351 CF8M
225L1E4A3	1500	DN 100 4 in	21.50 in 546 mm	12.25 in 311 mm	187	0.74 psig 0.051 bar	A351 CF8M
225N1E4A3	1500	DN 150 6 in	27.75 in 705 mm	15.50 in 394 mm	512	0.83 psig 0.057 bar	A351 CF8M
225O1E4A3	1500	DN 200 8 in	32.75 in 832 mm	19 in 483 mm	777	0.83 psig 0.057 bar	A351 CF8M

Results 1 - 79 of 79