




20-300: SQUARE PATTERN BRONZE WATER GAUGES

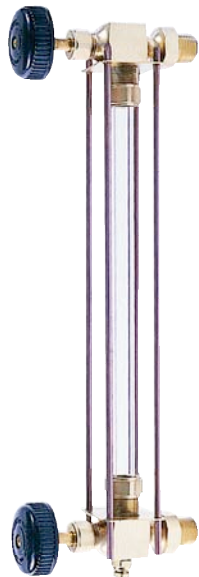

OVERVIEW

Available with 1/2" (ASTM B-16 brass bar stock) or 3/4" (B-584 cast bronze) NPT male pipe connections. Four guard rods and EPDM gauge glass gaskets standard. Other glass gaskets available. Automatic ball checks help prevent the loss of fluids should the glass be broken.

FEATURES

- Standard 1/4" needle drain valve in lower arm
- Pet cock or Apollo® ball valve drain on request
- Ball checks standard on **20-350**
- Rated: 200 psig @ 400°F, 400 psig @ 100°F (See note!)
- CRN Registered

| Part Number | Pipe Size (in.) | Glass O.D. & Length | Wt./100 (lbs.) | Wheel Type |
|-------------|-----------------|---------------------|----------------|-------------|
| 20-304 | 1/2 | 5/8 x 12 | 260 | ALUMINUM |
| 20-305 | 1/2 | 5/8 x 12 | 270 | COMPOSITION |
| 20-307 | 3/4 | 3/4 x 16 | 345 | ALUMINUM |
| 20-308 | 3/4 | 3/4 x 16 | 365 | COMPOSITION |
| 20-350* | 1/2 | 5/8 x 12 | 265 | ALUMINUM |
| 20-351* | 1/2 | 5/8 x 12 | 265 | COMPOSITION |
| 20-353* | 3/4 | 3/4 x 16 | 360 | ALUMINUM |
| 20-354* | 3/4 | 3/4 x 16 | 365 | COMPOSITION |

*Note: Service ratings are subject to pressure/temperature ratings of gauge glass and glass gaskets.
* Automatic ball valves*

OPTIONS

| Suffix Number | Specification |
|---------------|--|
| -00 | Standard gauge w/ standard glass & rod |
| -01 | Top only |
| -02 | Bottom only |
| -03 | Standard gauge less glass & rod |
| -10 | For special gauges w/ non-standard glass and rod lengths |